

Guangzhou Jiguang Lighting Co.,Ltd


Integrated LED Tube Light



Features

- ★ Instant on, no flicker or buzz .
- ★ High power factor over 0.95 .
- ★ Aluminum + PC materials , good heat dissipating .
- ★ Install directly , no need tube fixture or holder.

U-Bent T8 LED Tube Light

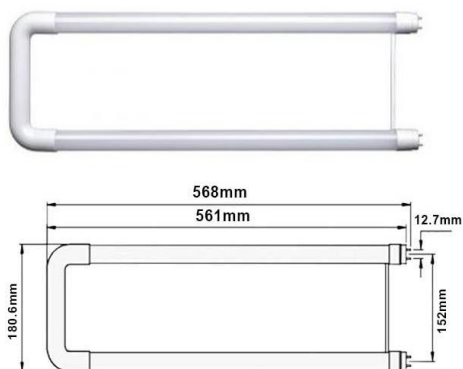

Benefits

- ★ Mercury-free , no hazardous waste disposal .
- ★ Suitable for operation at low temperatures .
- ★ Energy saving of up to 65% compared to T8 fluorescent lamp .

Application

- ★ Corridors, stairways , parking garages .
- ★ Industry, warehouses
- ★ Building , office , home , school .
- ★ Supermarkets and department stores , shops, etc.
- ★ Outdoor application only with suitable luminaries or housing .

Specification

Model No.	Length	Power	LED Chip	Input Voltage	Power Factor	Lumens Output	Color Temperature	CRI	Life Time	Beam Angle
T8 Integrated LED Tube										
CP-T806-9WI	600mm / 2ft	9W	SMD2835	100-240V AC	0.93	990 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T812-18WI	1200mm / 4ft	18W	SMD2835	100-240V AC	0.97	1980 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T815-23WI	1500mm / 5ft	23W	SMD2835	100-240V AC	0.97	2450 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
T5 Integrated LED Tube										
CP-T506-9WI	600mm / 2ft	9W	SMD2835	100-240V AC	0.93	990 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T512-18WI	1200mm / 4ft	18W	SMD2835	100-240V AC	0.97	1980 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
CP-T515-23WI	1500mm / 5ft	23W	SMD2835	100-240V AC	0.97	2450 lm	2700K-7000K	Ra>80	50,000 Hrs	160°
U-Bent T8 LED Tube										
CP-T806-18WU	600mm / 2ft	18W	SMD2835	100-277V AC	0.95	1980 lm	2700K-7000K	Ra>80	50,000 Hrs	160°

OEM Service

- ★ Can customize different length and wattage
- ★ Can customize higher brightness
- ★ Can customize higher CRI

Packing

Model No.	CP-T806-9WI	CP-T812-18WI	CP-T815-23WI	CP-T506-9WI	CP-T512-18WI	CP-T515-23WI	CP-T806-18WU
Carton Size	127*22*25cm	127*22*25cm	157*22*25cm	124*35*24cm	124*35*24cm	154*35*24cm	66*28*25cm
Pcs/CTN	50	25	25	100	50	50	10
Volume	0.0699 CBM	0.0699 CBM	0.0864 CBM	0.1042 CBM	0.1042 CBM	0.1294 CBM	0.0462 CBM
Gross Weight	7.5kg	7kg	8.5kg	13kg	12kg	15kg	5kg